

BCS 5100


PUNCH BLOCK DIAGRAM

PB#1

SIZE	DWG NO.	
A	573-022	
A	SL566	
B	SM381	

DEVICE DESCRIPTION: PUNCH DOWN BLOCK
 INPUT FROM: CPU & POWER CONVERTER
 OUTPUT TO: OPERATOR DISPLAYS, ADMIN PHONES & MONITOR PANEL

5120-9920
 5130-9120, 9131

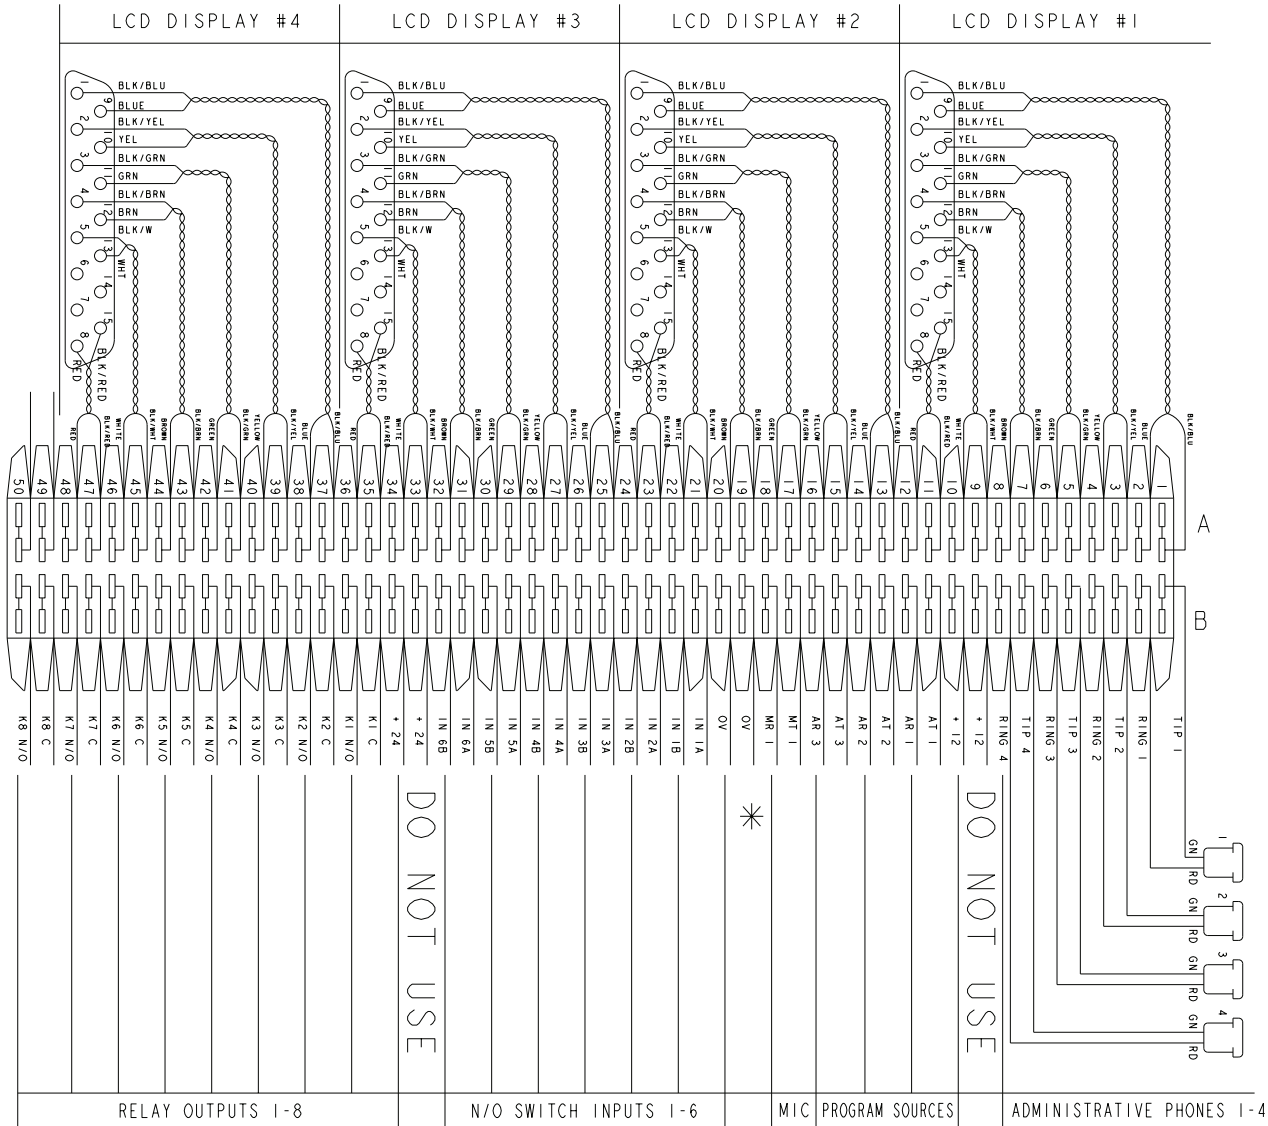

TOP

Simplex
 ©SIMPLEX TIME RECORDER CO., GARDNER, MA.

TITLE	WIRING DIAGRAM	
EQUIP	5100 SERIES	
SIZE	DWG NO.	SHT
A	573-022	47

RECOMMENDED FIELD WIRING: 20-24 AWG SOLID COPPER; TWISTED PAIRS
 SEE WIRE SPEC. FOR EXACT WIRING SPECIFICATIONS

*(USE FOR MICROPHONE SHEILD ONLY)