


Technical Specifications

V-9807/V-9808 Vandal-Resistant Enclosure and Faceplate

- Optimal protection for 8-Inch speakers
- Heavy gauge steel
- Vandal-resistant
- Knockout for 0.50in or 0.75in conduit
- Steel mesh security baffle prevents objects from penetrating the speaker
- Indoor use

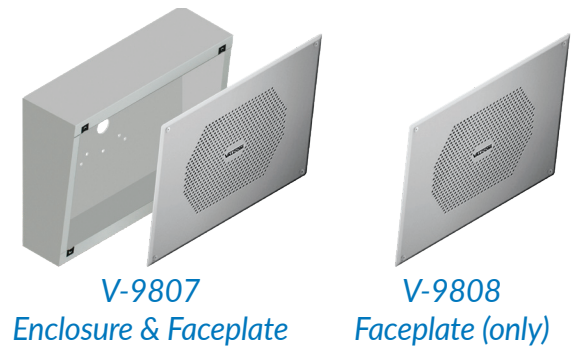

Description:

The V-9807/V-9808 Vandal-Resistant Enclosure and Faceplate provides extra security for an 8-inch speaker. The faceplate is designed to prevent objects from penetrating the speaker. 8-inch cone speaker not included.

SPECIFICATIONS

HOUSING AND FINISH

Heavy gauge steel
gray powder coat finish

MOUNTING

V-9807: Surface
V-9808: Recessed

DIMENSIONS AND WEIGHT

10.00in H x 12.25in W x 4.00in D
(25.40cm x 31.12cm x 10.16cm)

Weight: 7.00lbs (3.30kg)

Shipping Weight: 9.00lbs (4.05kg)

Faceplate (only)

8.50in H x 11.00in W
(21.59cm x 27.94cm)

Weight: 2.00lbs (.90kg)

Shipping Weight: 4.80lbs (2.16kg)

ARCHITECTS AND ENGINEERS

The Vandal-Resistant Enclosure and Faceplate, model V-9807, shall consist of an enclosure, faceplate and non-loosening screws. The Vandal-Resistant Faceplate, model V-9808, shall consist of a faceplate and non-loosening screws. The V-9807/V-9808 shall provide a virtually indestructible, surface mounting for Valcom's 8.00in cone speakers.

The V-9807/V-9808 Vandal-Resistant Enclosure and Faceplate shall be constructed of heavy gauge steel with powder coat gray finish. The V-9807/V-9808 shall be suitable for indoor applications.

The V-9807/V-9808 tamper-resistant faceplate screws shall resist removal. The V-9807 provides mounting holes for single-gang,

double-gang or octagon outlet box or attachment to any solid surface.

V-9807 maximum dimensions shall be: 10.00in H x 12.25in W x 4.00in D (25.40cm x 31.12cm x 10.16cm). Weight shall be approximately: 7.00lbs (3.20kg).

V-9808 maximum dimensions shall be: 10.00in H x 12.25in W (25.40cm x 31.12cm). Weight shall be approximately: 2.40lbs (3.20kg).

Warranty information may be found on our website at www.valcom.com/warranty.

2022 Rev. 1.7.18